

Self-Propelled Rough-Terrain Scissor Lifts



Dingli



JCPT1217RTI

JCPT1417RTI

| | | | |
|--|---|---------------|----------------|
| | S.W.L | 454kg | 345kg |
| | S.W.L On Extension | 136kg | 136kg |
| | Max. Occupants | 4 | 3 |
| | A Working Height | 12.00m | 14.00m |
| | B Platform Floor Height | 10.00m | 12.00m |
| | C Overall Length (With/Without Outriggers) | 3.32m/2.67m | 3.32m/2.67m |
| | D Overall Width | 1.73m | 1.73m |
| | Overall Height (Rails Up) | 2.60m | 2.70m |
| | E Overall Height (Rails Down) | 2.00m | 2.10m |
| | Platform Size (Length/Width F) | 2.51m×1.55m | 2.51m×1.55m |
| | G Platform Extension Size | 1.43m | 1.43m |
| | Ground Clearance | 0.16m | 0.16m |
| | H Wheelbase | 1.85m | 1.85m |
| | Turning Radius (Inside/Outside) | 1.55m/3.80m | 1.55m/3.80m |
| | Engine | Kubota D1105 | 18.6kW/2400rpm |
| | Travel Speed (Stowed) | 5.4km/h | 5.4km/h |
| | Travel Speed (Raised) | 1.1km/h | 1.1km/h |
| | Up/Down Speed | 40/37sec | 50/40sec |
| | Gradeability | 40% | 40% |
| | Maximum Working Slope | 2°/3° | 2°/3° |
| | Hydraulic Tank | 62L | 62L |
| | Diesel Tank | 55L | 55L |
| | Tyres | 26×12-16.5 | 26×12-16.5 |
| | Weight (With/Without Outriggers) | 4220kg/3870kg | 4420kg/4070kg |

Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Brake System
- Anti-restart Engine Protection
- Onboard Diagnostic System
- European III Emission Engine
- Slide-out Engine Tray
- Oscillating Axle
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Hydraulic Oil Cooler
- Folding Guardrails
- All Motion Alarm
- 4WD
- Safety Brackets
- Hour Meter
- Foam-filled Tyres
- Flashing Beacon
- Tilt Sensor With Alarm

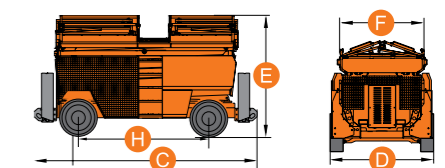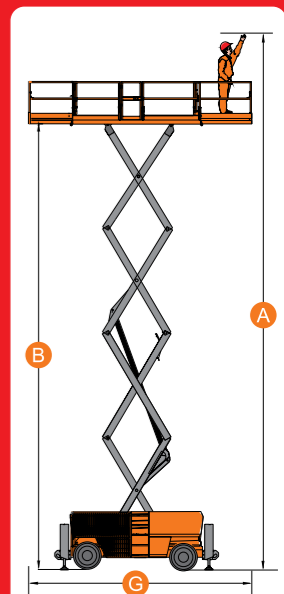

Oscillating Axle



Safety Bracket



Folding Guardrails



Brake Release Valve



Automatic Leveling Outriggers



Extended Platform



Swing-out Engine Tray



Gradeability