



Self-Propelled Scissor Lift (Electric Motor Drive)




Dingli **JCPT0607DCS**

	S.W.L	240kg
	S.W.L On Extension	100kg
	Max. Occupants	2
	A Working Height (CE/ANSI)	5.60m/5.90m
	B Platform Floor Height (CE/ANSI)	3.60m/3.90m
	C Overall Length (With Ladder)	1.44m
	Overall Length (Without Ladder)	1.29m
	D Overall Width	0.76m
	E Overall Height (Rails Up)	2.03m
	Overall Height (Rails Down)	1.67m
	F Platform Size (Length/Width)	1.29x0.70m
	G Platform Extension Size	0.60m
	Ground Clearance (Stowed)	0.06m
	Ground Clearance (Raised)	0.015m
	Wheelbase	1.05m
	Turning Radius (Inside/Outside)	0.40m/1.55m
	Drive Motors	2x24VDC/0.4kW
	Lifting Motor	24VDC/0.8kW
	Travel Speed (Stowed)	4.0km/h
	Travel Speed (Raised)	1.1km/h
	Up/Down Speed	32/27sec
	Batteries	2x12V/85Ah
	Integrated Charger	24V/10A
	Gradeability	25%
	Maximum Working Slope (CE)	1.5°/3°
	Maximum Working Slope (ANSI)	2°/3°
	Tyre	□230x80mm
	Weight (CE/ANSI)	880kg



Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Cylinder Holding Valve
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

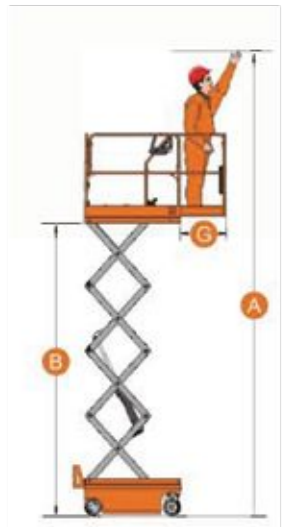

Compact Turning Radius



Pothole Device



Touch Display Screen



Gradeability



Extended Platform



Folding Guardrails



Slide Out Tray



Safety Bracket