

## Self-Propelled Rough-Terrain Scissor Lifts



### Standard Equipment



- Proportional Controls
- Self-lock Gate On Platform
- Automatic Brake System
- Anti-restart Engine Protection
- Onboard Diagnostic System
- European III Emission Engine
- Slide-out Engine Tray
- Safety Electric Pump
- Emergency Stop Button
- Cylinder Holding Valve
- Dual Extended Platforms
- Horn
- Hydraulic Oil Cooler
- Folding Guardrails
- All Motion Alarm
- 4WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm

### Dingli

JCPT1523RT

JCPT1823RT

|  |   |                |                |
|--|---|----------------|----------------|
|  | S.W.L   | 680kg          | 680kg          |
|  | S.W.L On Extension                                | 227kg          | 227kg          |
|  | Max. Occupants                                    | 7              | 6              |
|  | <b>A</b> Working Height                           | 15.00m         | 18.00m         |
|  | <b>B</b> Platform Floor Height                    | 13.00m         | 16.00m         |
|  | <b>C</b> Overall Length (With/Without Outriggers) | 4.88m/3.98m    | 4.88m/3.98m    |
|  | <b>D</b> Overall Width                            | 2.27m          | 2.27m          |
|  | Overall Height (Rails Up)                         | 2.98m          | 3.19m          |
|  | <b>E</b> Overall Height (Rails Down)              | 2.28m          | 2.49m          |
|  | Platform Size (Length/Width <b>F</b> )            | 3.98m×1.83m    | 3.98m×1.83m    |
|  | <b>G</b> Platform Extension Size                  | 6.57m×1.83m    | 6.57m×1.83m    |
|  | Ground Clearance                                  | 0.22m          | 0.22m          |
|  | <b>H</b> Wheelbase                                | 2.86m          | 2.86m          |
|  | Turning Radius (Inside/Outside)                   | 2.35m/5.20m    | 2.35m/5.20m    |
|  | Engine  |                |                |
|  | Perkins 404D22                                    | 38kW/3000rpm   | 38kW/3000rpm   |
|  | Kubota V2403 M DI                                 | 36.5kW/2600rpm | 36.5kW/2600rpm |
|  | Travel Speed (Stowed)                             | 6.1km/h        | 6.1km/h        |
|  | Travel Speed (Raised)                             | 1.1km/h        | 1.1km/h        |
|  | Up/Down Speed                                     | 70/52sec       | 123/74sec      |
|  | Gradeability                                      | 50%            | 40%            |
|  | Maximum Working Slope                             | 2°/3°          | 2°/3°          |
|  | Hydraulic Tank                                    | 130L           | 130L           |
|  | Diesel Tank                                       | 100L           | 100L           |
|  | Tyres   | 33×12-20       | 33×12-20       |
|  | Weight (With/Without Outriggers)                  | 8200kg/7680kg  | 9190kg/8670kg  |

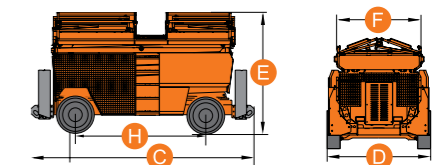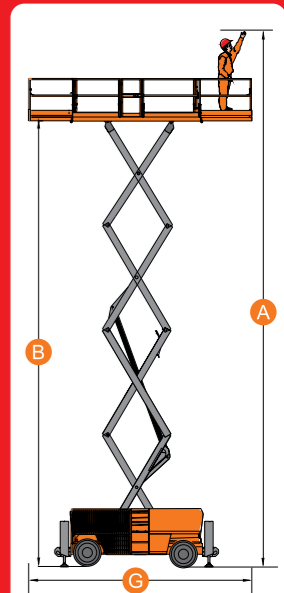

Slide-Out Battery



Slide-Out Engine Tray



Automatic Leveling Outriggers



Fully Protected Chassis



Waterproof



Extended Platform



Folding Guardrails



Gradeability