





Self-Propelled Telescopic Boom Lifts (Battery Drive)



Dingli **GTBZ20AE**

	S.W.L Max. Occupants	230kg 2
	Max. Working Height Max. Platform Height	20.23m 18.23m
	Max. Horizontal Reach Turntable Tailswing Up and Over Clearance	11.14m 0.63m 7.65m
	Overall Length (Stowed)	8.61m
	Overall Length (Transport)	6.71m
	Overall Width Overall Width (Transport)	2.49m 2.30m
	Overall Height Overall Height (Transport)	2.44m 2.45m
	Platform Size (Length/Width)	2.20m x 0.80m
	Ground Clearance	0.34m
	Wheel Base Turning Radius (Inside/Outside)	2.60m 3.37m/5.37m
	Turret Rotation	360° continuous
	Platform Rotation	+/-90°
	Jib Movement	+70°/-60°
	Batteries Integrated Charger	8x6V/420Ah 48V/35A
	Drive Motor Lifting Motor	AC 48V/3.3kW 48V/3.8kW
	Travel Speed (Stowed) Travel Speed (Working)	6.1km/h ≤1.1km/h
	Gradeability Maximum Slope	40% 5°
	Hydraulic Tank	67L
	Tyre	315/55 D20
	Gross Weight	8360kg

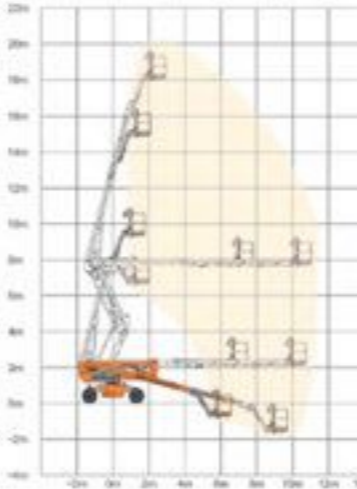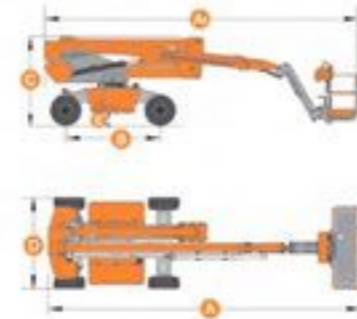

Standard Equipment

- Proportional Controls
- Safety Electric Pump
- Hour Meter
- Tilt Sensor
- 360° Continuous Turntable Rotation
- Self-Leveling Platform
- Foot Switch
- 4x4 Drive
- Foam-Filled Tyres
- Onboard Diagnostic System
- All Motion Alarm
- Horn
- Flashing Beacon
- Zero Emission

Options

- AC Power To Platform
- Platform Work Lights
- Overload Sensor With Alarm
- Non-Marking Tyres



Gradeability



Batteries



Under Ground Reach