



Self-Propelled Rough-Terrain Scissor Lifts





Dingli	JCPT1218DCRT	JCPT1418DCRT
--------	--------------	--------------

	S.W.L	454kg	345kg
	S.W.L on Extension	136kg	136kg
	Max. Occupants	4	3
	A Working Height	12.00m	14.30m
	B Platform Floor Height	10.00m	12.30m
	C Overall Length (With/Without Outriggers)	3.84m/3.19m	3.84m/3.19m
	D Overall Width	1.76m	1.76m
	Overall Height (Rails Up)	2.60m	2.74m
	C Overall Height (Rails Down)	1.82m	1.97m
	Platform Size (Length/Width F)	2.88m x 1.52m	2.88m x 1.52m
	G Platform Extension Size	1.43m	1.43m
	Ground Clearance	0.24m	0.24m
	H Wheel Base	2.29m	2.29m
	Turning Radius (Inside/Outside)	2.15m/4.85m	2.15m/4.85m
	Engine	Kubota D1105 18.6kW/2400rpm	Kubota D1105 18.6kW/2400rpm
	Batteries		8x6V/315Ah
	Integrated Charger		48V/25A
	Travel Speed (Stowed)	6.3km/h	6.3km/h
	Travel Speed (Working)	0.45km/h	0.45km/h
	Up/Down Speed	40/37sec	50/40sec
	Gradeability	40%	40%
	Maximum Working Slope	2□3□	2°/3°
	Hydraulic Tank	62L	62L
	Tyres	26 x 12-16.5	26x12-16.5
	Weight (With/Without Outriggers)	4950kg	5150kg



Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Brake System
- Anti-restart Engine Protection
- Onboard Diagnostic System
- Oscillating Axle
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Hydraulic Oil Cooler
- Folding Guardrails
- All Motion Alarm
- Safety Brackets
- Hour Meter
- Foam-filled Tyres
- Flashing Beacon
- Tilt Sensor With Alarm

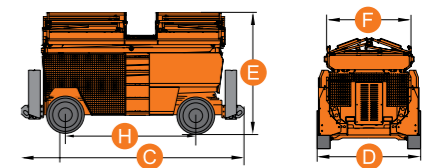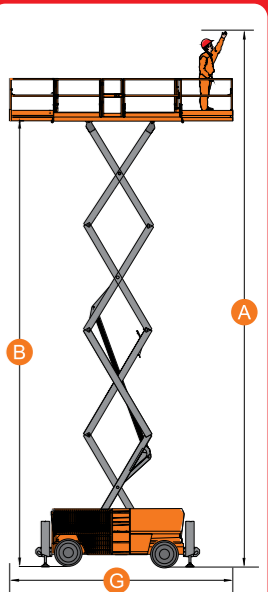

Oscillating Axle



Safety Bracket



Folding Guardrails



Brake Release Valve



Automatic Leveling Outriggers



Extended Platform



Gradeability