

Dingli Boom Lifts Product Manuals



Electric



Engine




DINGLI[®]
Exceed · New Height



Dingli Self-propelled Boom Lifts Are Divided Into Telescopic Boom Lifts And Articulating Boom Lifts, With Two Types Driving Mode Of Electric Drive And Engine Drive. There Are 14 Models In The Whole Series, Including 10 Telescopic Boom Lifts And 4 Articulating Boom Lifts, With Working Heights Ranging From 24.3m To 30.3m. The Whole Series Is Jointly Developed By Dingli And Italian Research And Development(R&D) Center, With Completely Independent Intellectual Property Rights.

The Whole Series Of Boom Lifts' Counterweight And Center Of Gravity Move Down, Adopts The Whole Components To Move Down Design, Inherits The Family Modular Concept, Relies On The Performance Guarantees Of A Series Of High-end Configuration Such As American DANA Spicer Axle, Germany Bosch Rexroth High Pressure Driveline System And Danish Danfoss PVG Hydraulic Control System, Which Are The World's Leading Technology. They Have Many Advantages Such As Heavy Load, Strong Power, High Chassis, Easy Maintenance, Easy Transportation, Stable Control, Safer, High Energy Saving, Great Endurance Ability, More Environmentally Friendly, Etc., And Can Be Competent For All Kinds Of Complex And Severe Limit Working Conditions!

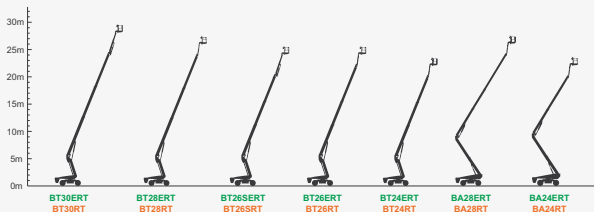

**Heavy Load**

The Whole Series Of Telescopic Boom Lifts Max. Load 454kg (Full Height Travel), Articulating Boom Lifts Max. Load 300kg (Full Height Travel), The Load Capacity Is Greater.

**Stable Control**

The Whole Series Adopt The Whole Component To Move Down Design, The Center Of Gravity Is Lowered, Cooperate With The Special Intelligent Control System, Making The Whole Machine More Stable, The Operation Is More Stable.

**High Chassis**

The Whole Series Is Equipped With Large Wheel Hub, Tire Diameter Of 108cm, Chassis Clearance Of 41cm, Compared With The Traditional Boom Lifts, Better Passability.

**Easy Transportation**

The Whole Series Not Only Can Be Transported By Basic Flatbed Truck, But Also Can Be Shipped In Regular Container (40HQ).

**Strong Power**

Equipped With A Special Axle For Aerial Working Platforms, It Can Meet The Requirements Of 4WD, And The Gradeability Is Up To 45% (Engine Type); Equipped With 100% Hydraulic Differential Lock System, Even If Three Wheels Slip, Start Differential Lock System Can Still Go Forward, Rough-terrain Performance Is Stronger.

**High Energy Saving**

The Engine Type Is Equipped With ECO Green Energy Saving System, Which Can Control Engine Speed Intelligently, Supply Oil On Demand, Heat Dissipation According To Temperature, And Save Energy.

**Great Endurance Ability**

The Electric Type Whole Series Is Equipped With 520Ah/80V High-capacity Lithium Battery, With Greater Endurance Ability.

**More environmentally friendly**

The Full Range Of Electric Models Are Equipped With Dedicated Electric Drive Axles, Using Batteries As The Power Source, With Low Noise, Zero Emissions, No Pollution, And More Environmentally Friendly.

**Easy Maintenance**

The Whole Series Adopts The Family Modular Design, 95% Main Components Are Common, More Than 80% Structural Parts Are Common. Only Need To Repair 1 Model, The Whole Series Of Models Are Covered; Only Need To Purchase 1 Set Of Components, The Whole Series Of Models Are All Universal. The Electric Model Is Equipped With A Five-year Warranty Without Maintenance Lithium Battery, Which Greatly Reduces The Cost Of Engine Maintenance And Diesel Addition.

**Safer**

The Whole Series Is Equipped With The Dual Sensing System, Intelligent Anti-extrusion System, Intelligent Safety Valve Protection System, Etc. Which Is More Secure. The Boom Uses Q960 Special Steel, The Safety Is Higher. The Maintenance-free Lithium Battery Of The Electric Type Is Equipped With BMS Battery Management System To Ensure The Equipment Electricity Safety.

**The Gradeability Up To 45%****Anti-extrusion Device**

Crab Row


BigTurn

Multiple Steering Modes**100% Hydraulic Differential Lock System**
Three Wheels Slip, Can Still Go Forward**High-capacity Lithium Battery Pack**



Self-propelled Telescopic Boom Lifts(Engine Axle Types)

The Maximum Working Height Is From 15.6 Meters To 20.3 Meters, And The Maximum Load Is 18000kg. Equipped With A Special Axle For Aerial Working Platforms, And Adopting 4WD And 4WS, Stronger Off-road Capability, It Is Standard With A 6.7m×2.24m Super-large Working Platform, Which Can Move Back And Forth 2.19m And Turn Around 180°. It Has A Wide Operating Range And Can Meet The Requirements Of Multiple People Working At The Same Time. It Is Widely Applicable To The Construction Of Culverts, Viaducts, Steel Structure Plants, Curtain Walls, Subway Stations And Other Working Conditions.

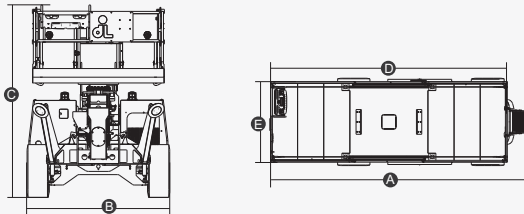

Model	GTBZ20SU
Size	
Max. Working Height	20.30m
Max. Platform Height	18.30m
Max. Front Outreach(Outriggers Extension)	11.70m
Max. Rear Outreach(Outriggers Extension)	4.09m
Max. Platform Slide	2.19m
Overall Length (A)	7.68m
Overall Width(Stowed) (B)	2.46m
Overall Width(Transport)	2.30m
Overall Height(Rails Up) (C)	3.80m
Overall Height(Rails Down)	2.89m
Overall Height(Transport)	2.59m
Platform Size(Length (D) × Width (E))	6.70m × 2.24m
Ground Clearance	0.37m
Wheelbase	4.00m
Turning Radius(Inside/Outside)	3.24m/4.97m
Tyres	385-65/22.5
Performance	
S.W.L	1350kg
Max. Goods Loading	900kg
Max. Occupants	4
Platform Swing Angle	+/-90°
Gradeability	40%
Travel Speed(Stowed)	6.00km/h
Travel Speed(Raised)	0.90km/h
Max.Working Slope	3°/5°
Chassis Leveling	10°
Weight	
Overall Weight	18000kg
Power	
Diesel Engine	Deutz TD2.9 L4 55.4kW/2600rpm
Hydraulic Oil Tank	216L